

BROADBAND 3dB HYBRID

700 - 2700 MHz


HC-W2

Product Features

- Guaranteed PIM Compliance
- Wide Frequency Band Covering 700-2700MHz
- Low Insertion Loss
- Low VSWR
- High Isolation
- Indoor/ Outdoor Using IP65
- Available with Type N, 7/16DIN or 4.3/10 Connectors



Specification	Value
Coupling	3 dB
Insertion Loss	≤ 0.65
Isolation	≥ 23
Freq	700-2700MHz
VSWR	≤ 1.25
PIM Rating	-153dBc@2x43dBm
Power Rating	300W (average Per Port)
Impedance	50 ohm
Connector	N-female
Color	Red
Operating Temperature	-25°C to +75°C
Weight	0.60 kg

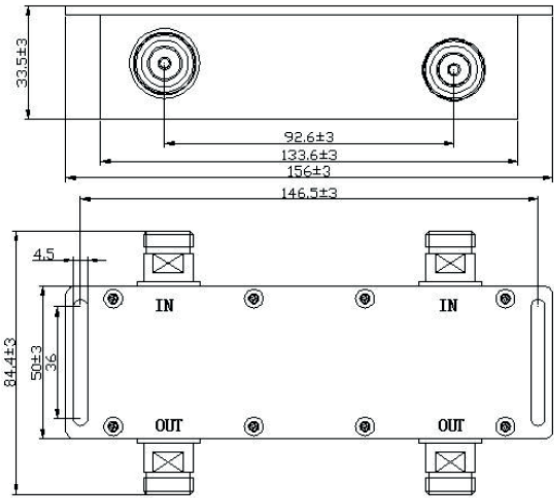

DOC SC109.04 - 10202020 - DMC
Fiplex is a registered trademark of Fiplex Communications, Inc.
Fiplex Communications, Inc. reserves the right to change specifications without prior notice.

