

DUPLEXER

136 - 174 / 380 - 520 MHz


DBC-12

Product Applications

- Guaranteed Parameter Compliance
- Wide Frequency Band Coverage
- Low Insertion Loss
- Low VSWR
- Indoor or Outdoor Using IP65
- Available with Type N, 7/16DIN or 4.3/10 Type Connectors



Specification	Value
Frequency(MHz)	CH1: 136-174 MHz CH2: 380-520 MHz
VSWR	≤ 1.30
Insertion Loss	≤ 0.7 dB
Isolation	≥ 50 dB
Impedance	50 ohm
Power Rating	50W (average Per Port)
Operating Temperature (deg)	-40~+85°C
Connector	N-female
Relative Humidity	5%-95%
Weight	0.38KG

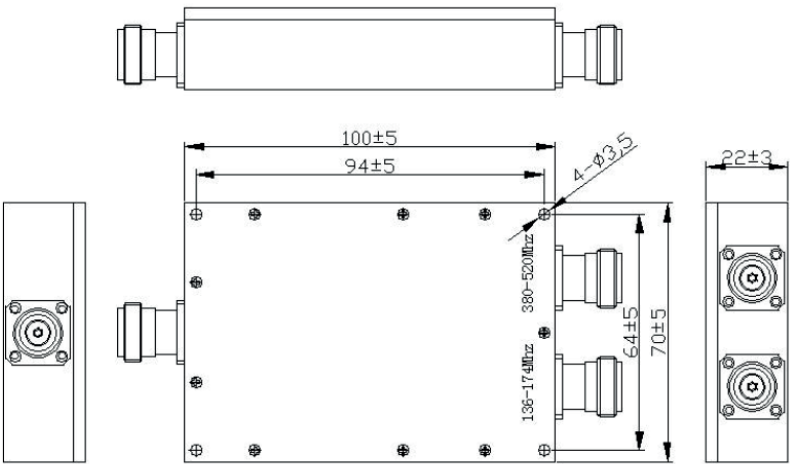

DOC SC136.01 - 10202020
Fiplex is a registered trademark of Fiplex Communications, Inc.
Fiplex Communications, Inc. reserves the right to change specifications without prior notice.

