

DUPLEXER

135 - 520 / 690 - 2700 MHz


DBC-22

Product Applications

- Guaranteed Parameter Compliance
- Wide Frequency Band Coverage
- Low Insertion Loss
- Low VSWR
- Indoor or Outdoor Using IP65
- Available with Type N, 7/16DIN or 4.3/10 Type Connectors



Specification	Value
Frequency(MHz)	CH1: 135-520 MHz CH2: 690-2700 MHz
VSWR	≤1.40
Insertion Loss	≤1.0 dB
Isolation	≥35
Impedance	50 ohm
Power Rating	50W (average Per Port)
Operating Temperature (deg)	-40~+85°C
Connector	N-female
Relative Humidity	5% -95%
Weight	1.7 KG

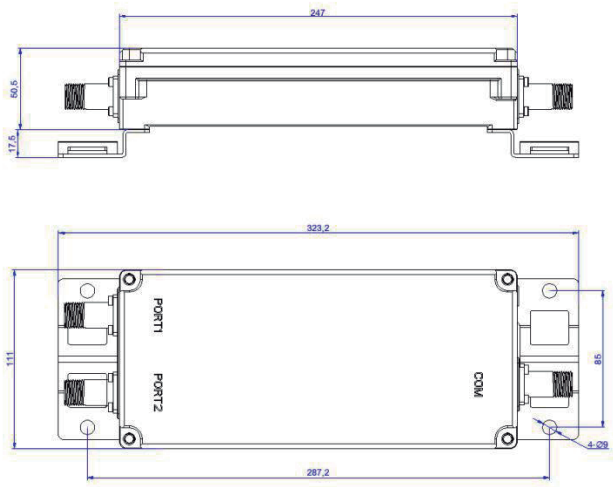

DOC SC137/01 - 10202020
Fiplex is a registered trademark of Fiplex Communications, Inc.
Fiplex Communications, Inc. reserves the right to change specifications without prior notice.

