

3dB HYBRID COUPLER

136 - 870 MHz


HC-L2

Product Applications

- Low Frequency Band Covering VHF, UHF and Tetra Band
- Low VSWR
- High Directivity
- Indoor Using IP60
- Available with Type N, 7/16DIN or 4.3/10 male Connectors



Specification	Value
Coupling(dB)	3
Accuracy(dB)	±1.3
Isolation	> = 18
Freq	136-870MHz
VSWR	≤1.30
Power Rating(W)	200W (average Per Port)
Impedance	50 Ω
Connector	N-female
Color	Red-plated
Operating Temperature	-25°C to +75°C
Weight	1.05 kg
Dimensions(mm)	See drawing

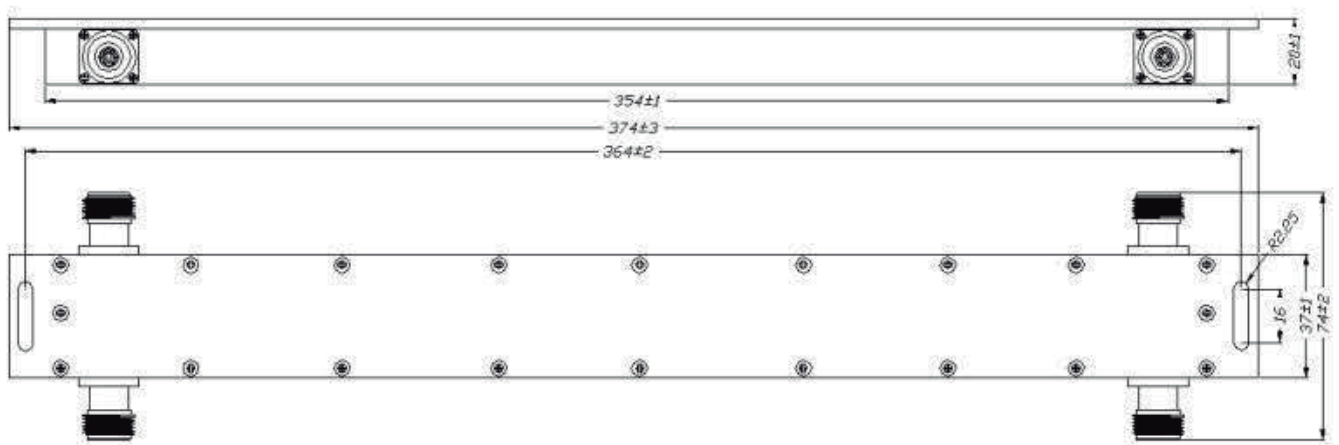

DOC 5C138.00 - 05182020
 Fiplex is a registered trademark of Fiplex Communications, Inc.
 Fiplex Communications, Inc. reserves the right to change specifications without prior notice.